


# Compression Pads | EV Battery Solutions

Avery Dennison offers pressure-sensitive adhesives and tapes to bond compression pad foam that protects EV Battery cells.

Individual prismatic and pouch cells in EV Battery packs need protection from impact and movement. Pouch cells can also swell during charging and discharging. To help prevent damage, EV Battery manufacturers are placing foams backed with pressure-sensitive tape between each cell.

The use of pressure-sensitive tapes for cell cushioning offers some key benefits.

- Pressure-sensitive tapes require no cure time and provide immediate strength – they can act as an assembly aid and a bonding solution, unlike liquid applied products
- Full coverage adhesion between the metalized polyester pouch cell and cushion foam when pressure-sensitive tapes are used
- Flame-retardant and dielectric tapes are available when there are flame or electrical requirements

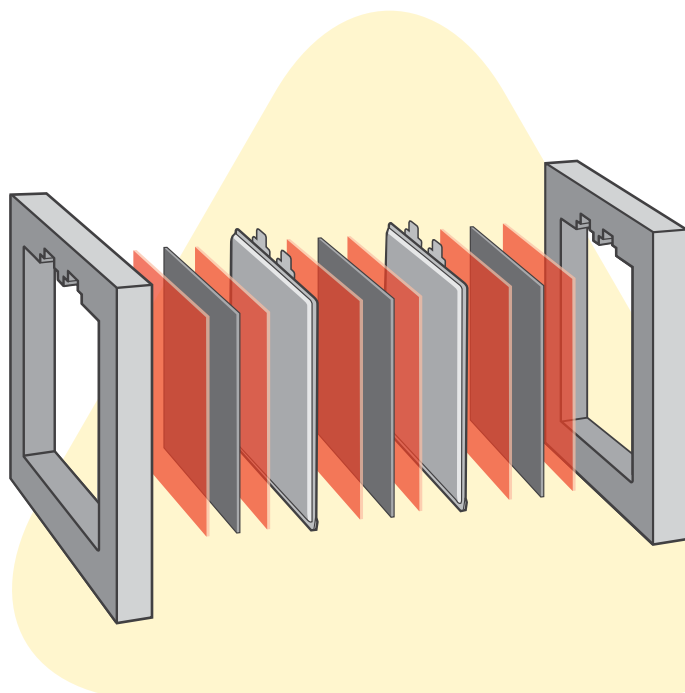

## Compression Pads Tape Product Portfolio

Product	Total Construction (minus liner)				Carrier		Adhesive		Liner	Key Benefits
	Type	Caliper (mils)	Color	Relative Cost	Film Type	Caliper (mils)	Adhesive Type	Caliper (mils)	Linered	
FT 8383EZ	Double Coated	3.3	Clear	\$	PET	0.5	Rubber	1.4 / 1.4	•	Economical and tacky, carrier for dimensional stability
FBA 8960	Double Coated	4.0	Clear	\$\$	PET	0.5	General Purpose Acrylic	1.4 / 2.1	•	Tacky with improved environmental resistance
FT 1123	Transfer Tape	2.5	Clear	\$\$	None	-	General Purpose Acrylic	2.5	•	Tacky with improved environmental resistance
FT 8065	Double Coated	5.6	White	\$\$\$	Flame Tough™ PET	1.6	Flame Tough™ Acrylic	2.0 / 2.0	•	Strong flame retardancy, carrier for dimensional stability
FT 1165	Transfer Tape	2.0	White	\$\$	None	-	Flame Tough™ Acrylic	2.0	•	Strong flame retardancy, transfer tape

## Avery Dennison EV Battery Tape Product Portfolio

The Avery Dennison EV Battery Portfolio includes a wide range of functional bonding and protection tapes, built on multiple pressure-sensitive adhesive technologies. These are engineered to make EV batteries safer, more efficient and easier to assemble.

The portfolio can help you solve for some of the most common challenges in battery design and construction.



### Reducing flammability

Acrylic- and silicone-based adhesives with Flame Tough™ flame-retardant adhesive properties allow composites and materials to meet UL® 94 V-0 and other flame requirements.



### Boosting dielectric strength


Single-coated Volt Tough™ tapes and double-coated tapes which incorporate dielectric films. Our materials and adhesives are tested for breakdown voltage and dielectric strength requirements using GB/T 1408.1-2016 and ASTM D3755 test methods.



### Optimizing design and assembly

Functional tapes can replace mechanical fastening methods while offering a thinner profile, lighter weight, repositionability and instant bond.

Visit [tapes.averydennison.com/evbattery](https://tapes.averydennison.com/evbattery) to review the full breadth of EV Battery Tape Portfolio solutions.

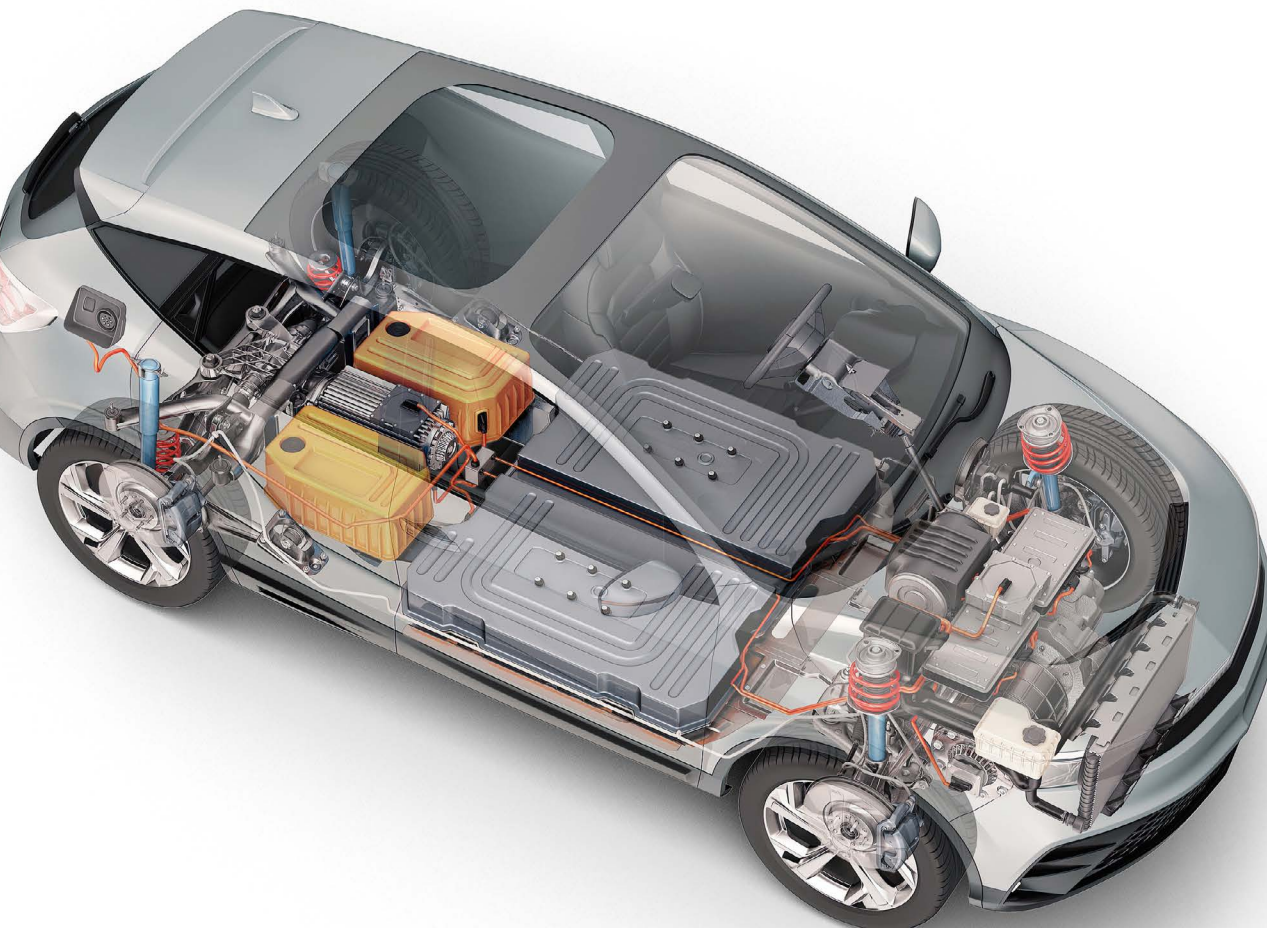

## Go beyond bonding with Avery Dennison: Expansive product selection, plus customization and testing capabilities

The Avery Dennison EV Battery portfolio offers multi-functional solutions that draw from our expansive portfolio of pressure-sensitive tapes and adhesives. We have a long track record in the automotive segment and are relied upon by OEMs and tier suppliers across the industry. Our products meet OEM specifications for a wide range of applications.

Beyond bonding means we also welcome the opportunity to collaborate with automotive OEMs and tier suppliers to develop custom tape solutions. You'll enjoy access to testing facilities and pressure-sensitive adhesive experts who understand the challenges engineers face. We can work together to produce one-of-a-kind products that give you the advantage you seek.

### Collaboration

- Global reach
- New product development for custom solution applications
- Business development and specification support for emerging applications
- Application engineering and technical support

### Testing

- ISO 17025 certified laboratory
- Online tool offering easy access to our database of OEM certifications
- Industry-standard and custom application testing
- Traditional pressure-sensitive adhesive bulk property testing (peel, tack and shear)
- Environmental conditioning (temperature, humidity, UV, chemical and more)
- Flame performance and dielectric strength testing at the tape and composite level



09/2023

[tapes.averydennison.com](https://tapes.averydennison.com)

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison products are sold subject to Avery Dennison's general terms and conditions of sale found at [tapes.averydennison.com/na/en/home/terms-and-conditions.html](https://tapes.averydennison.com/na/en/home/terms-and-conditions.html).

© 2023 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.